

## Introduction

Silego Technology's NVM Programmable Mixed-signal Matrix product family, GreenPAK, can be configured to provide a flexible, low-power and cost-effective capacitive touch button solution. GreenPAK can implement system reset and touch function in the same device, with the benefit of extra GPIO, logic, and timing resources that can be used to implement other system functions.


## How It Works

The Silego touch solutions use Projected Self Capacitance method. Using integrated mixed-signal components, GPAK compares the frequency passed through a reference circuit with that of the touch sensor.

As a finger approaches, the RC constant of the touch sensor changes, affecting the frequency passed through. Once a specified threshold is reached, GPAK recognizes the finger capacitance as valid button input. Using the internal RC oscillator, GPAK switches between wake and sleep states to conserve power.

The dual touch button design consists of three functional parts:

1. Wake and Sleep
2. Master and Slave Generator
3. Comparing and Signal Processing

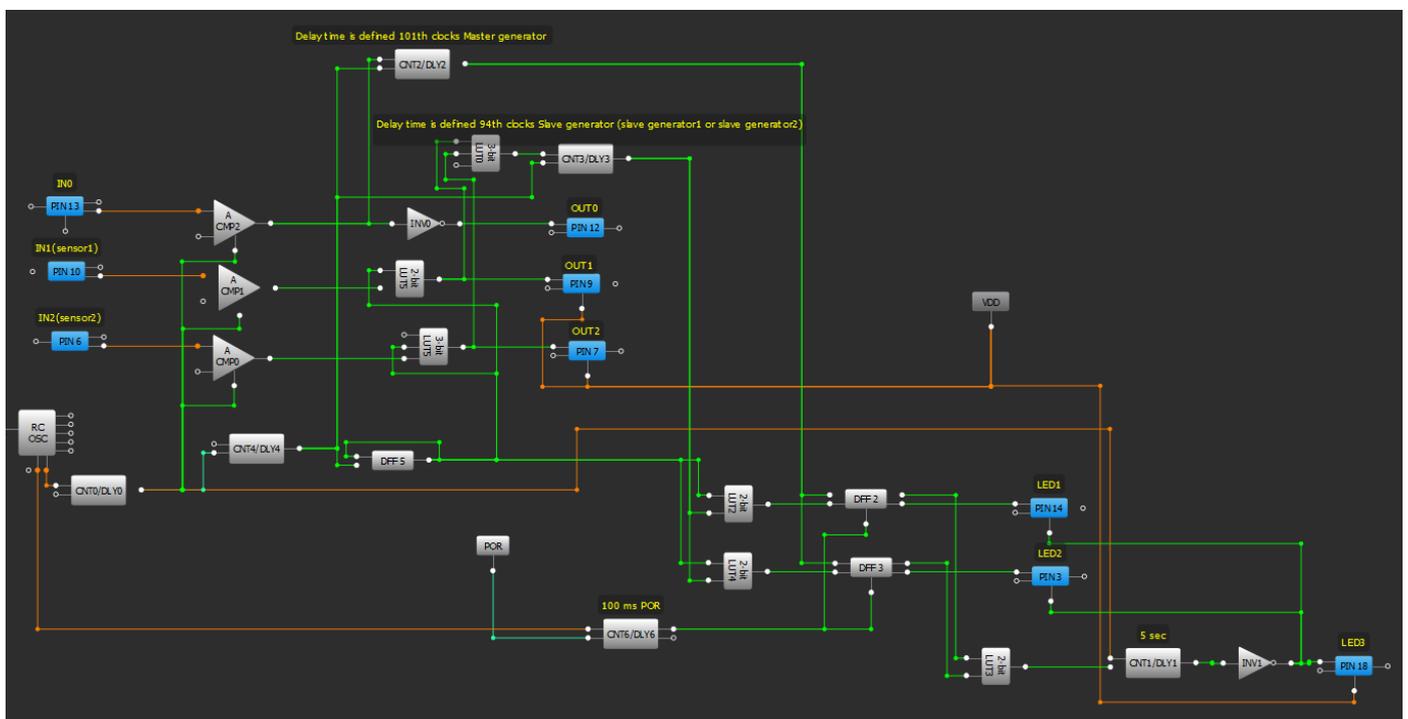

**Figure 1. Touch button circuit schematic**



### Wake and Sleep

The Wake and sleep circuit creates pulses with 28mS period and 2.5mS HIGH duration. This is made to reduce power consumption by ~10x. To prevent accidental waking, touches shorter than 56 mS will not be detected.

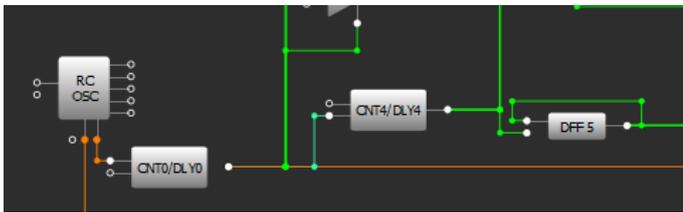


Figure 2. Wake and sleep circuit

### Master and Slave Generators

The generators have two inverters with external feedback that is connected to two metal plates.

Touching one of the metal plates increases the capacity in the feedback circuit, which causes the generated frequency to decrease. These generators are switched ON while the Wake and Sleep internal signal is HIGH.

### Comparing and Signal Processing

When the plate is touched, additional capacitance in the feedback circuit leads to a decrease of the generated frequency. Output of CNT0/DLY0 produces a pulse and starts the CNT2/DLY2 and CNT3/DLY3 operation with each having different clocking frequencies (Fclk). If the clocking frequencies are close or equal to each other, then the CNT3/DLY3 output pulse appears earlier than CNT2/DLY2 output. This timing will switch DFF3 or DFF2 output to LOW. If the frequencies differ more than ~5% (clock frequency for CNT3/DLY3 is less than clock frequency for CNT2/DLY2) then the DFF3 or DFF2 output switches to HIGH.


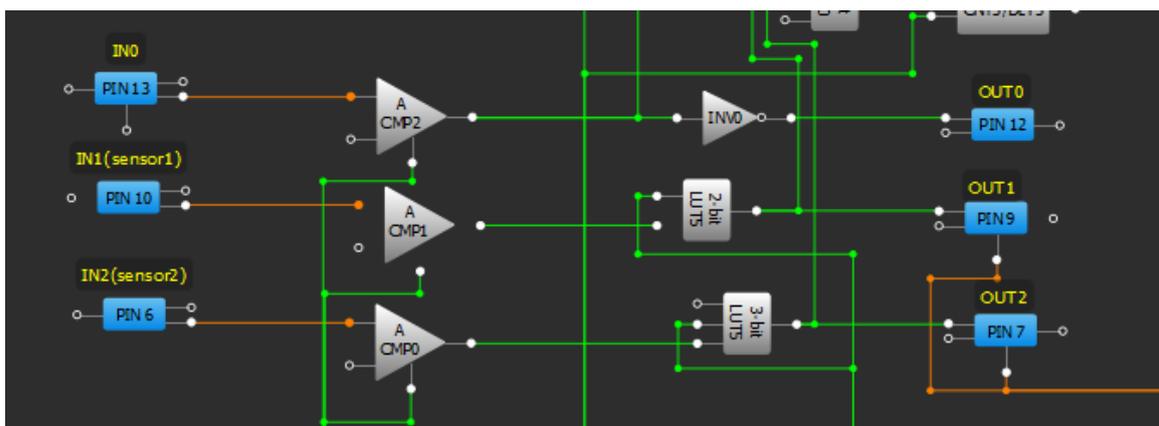


Figure 3. Touch plate input circuit

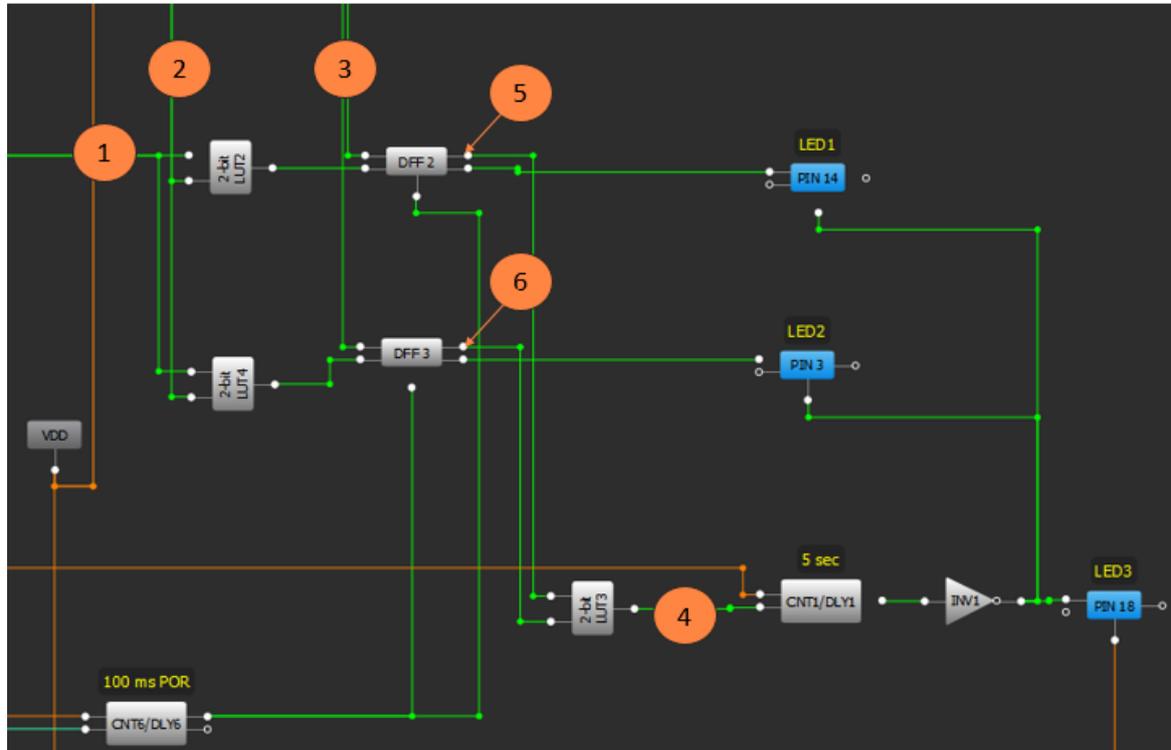

- 1 selecting signal (if signal is HIGH then Button 1 is selected or if signal is LOW then Button 2 is selected)
- 2 signal is CNT3/DLY3 overflow for Slave generator1 or 2 (if signal is HIGH then counter overflow)
- 3 signal is CNT2/DLY2 overflow for Master generator (if signal is HIGH then counter overflow)
- 4 if signal is High then both buttons are touched
- 5 if signal is High then Button1 are touched
- 6 if signal is High then Button2 are touched

Figure 4. Description for Fig. 5 timing diagram

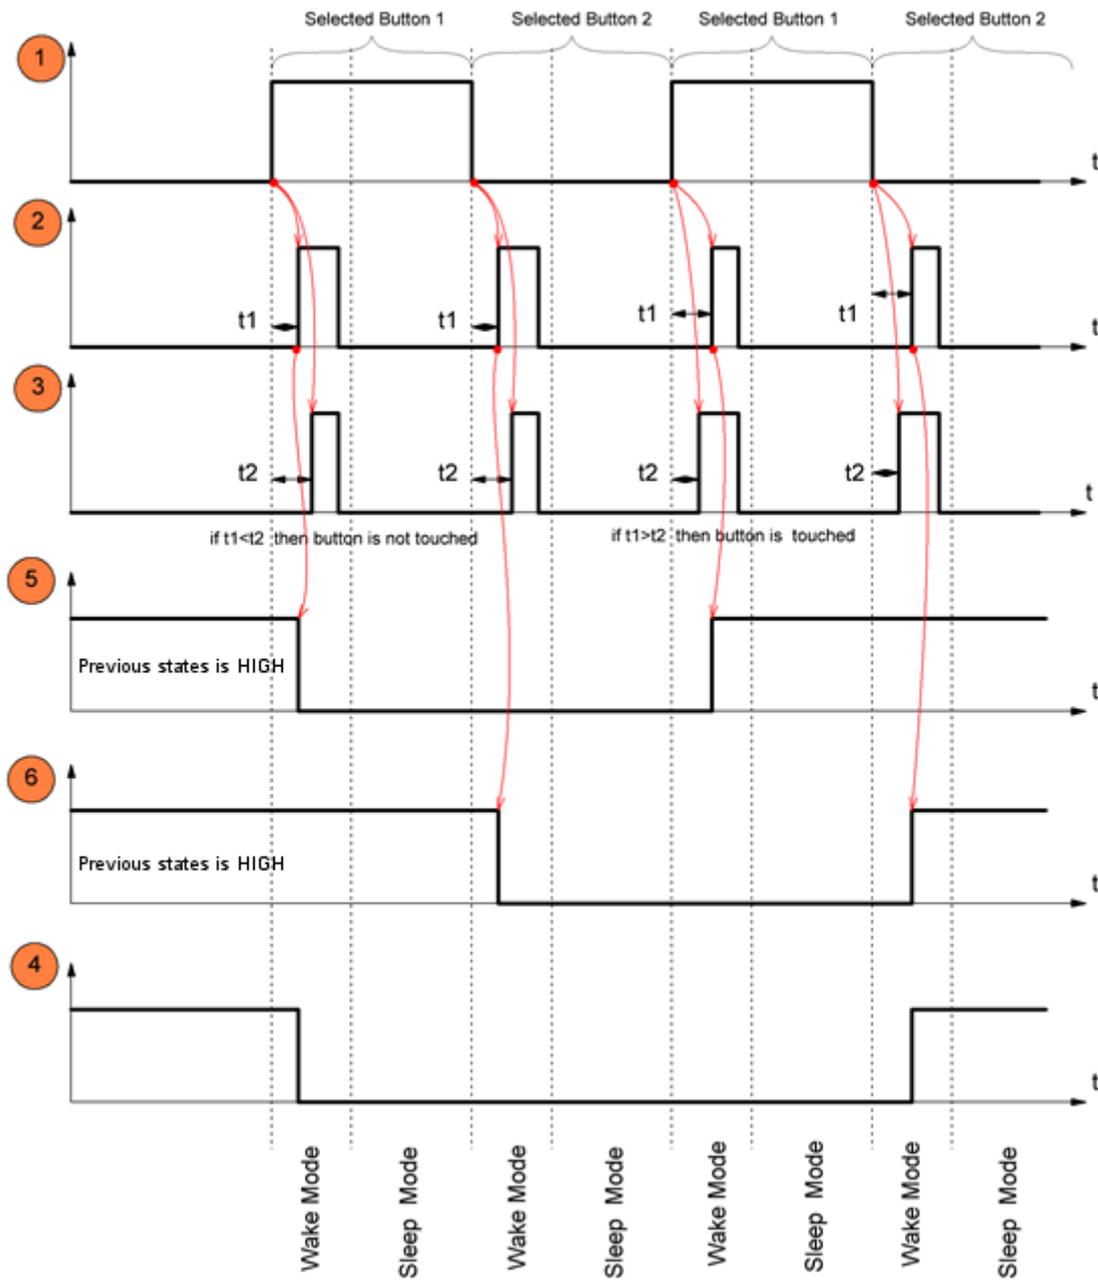


Figure 5. Touch sense timing diagram



### Single Button

Silego's smallest and lowest-cost GreenPAK device (SLG46110V) is capable of implementing touch buttons and more. This device is designed for space saving or simpler applications.

### Features

- 1.6 x 1.6 mm **SLG46110V**
- 3 extra GPIO available
- Extra logic and timing resources
- NVM tunable sensitivity

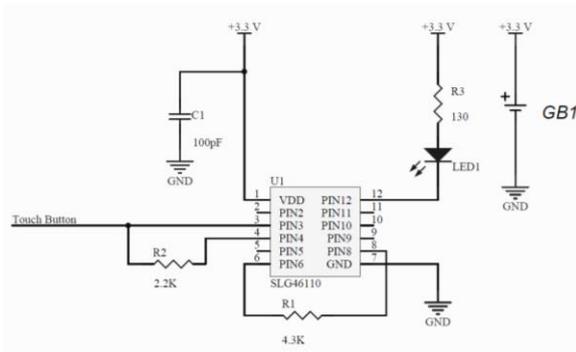


Figure 6. Single button schematic



Figure 7. Single button demo

### Dual Button Reset

A GreenPAK with more resources (SLG46721V) is capable of doing multiple touch buttons with additional functionality, such as RESET, while still reducing component cost and board space.

### Features

- 2.0 x 3.0 mm **SLG46721V**
- 9 extra GPIO available
- Extra logic and timing resources
- Independently NVM tunable sensitivity

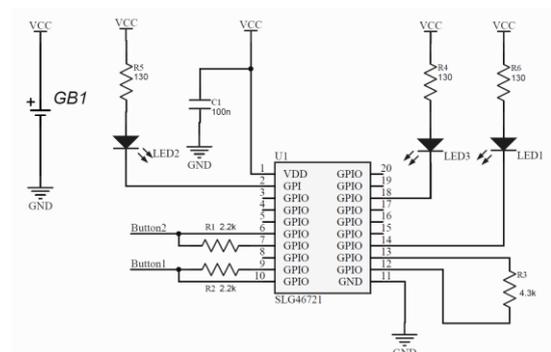


Figure 8. Dual button schematic

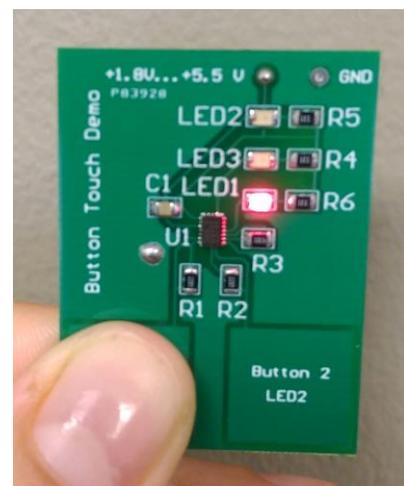


Figure 9. Dual button demo



### Adjustment sensitivity

There are two methods of sensitivity adjustment. The first method is an NVM tune. The second method is tuning by external resistor. For debugging of the device for small volume production, using a tuning external resistor is recommended. For large quantity mass production, the NVM tuning method is recommended.

---

Demo boards, datasheets, and technical information are available upon request. Contact us at [info@silego.com](mailto:info@silego.com) or visit our website: <http://www.silego.com> for more information on GreenPAK applications.

### Conclusion

This application example will be useful for developing devices that use intelligent touch control interfaces. Capacitive touch control interface offers a number of advantages to the manufacturer and consumer alike, including:

- Replacing mechanical buttons and switches.
- Reducing overall system cost.
- Enhancing reliability by eliminating mechanical wear and tear.
- Providing greater flexibility for product designers.



### About the Author

Name: Petro Levandovych

Background: Petro Levandovych joined Silego in 2012 and has more than 5 year of experience in electronics, radio communication equipment, microcontrollers and automated information system. He began his career with State Enterprise LVIV RADIO ENGINEERING RESEARCH INSTITUTE (SE LRERI), working as System Developer Engineer. Petro has graduated from the Lviv Polytechnic University as a specialist in Radio Communication Equipment Engineering in 2009.

Contact: [appnotes@silego.com](mailto:appnotes@silego.com)



### Document History

Document Title: Capacitive Touch Button Sensor

Document Number: AN-1077

Revision	Orig. of Change	Submission Date	Description of Change
A	Petro Levandovych	06/30/2015	New application note

### Worldwide Sales and Design Support

Silego Technology maintains a worldwide network of offices, solution centers, manufacturer’s representatives, and distributors. To find the office closest to you, visit us at [Silego Locations](#).

### About Silego Technology

Silego Technology, Inc. is a fabless CMIC company headquartered in Santa Clara, California, with operations in Taiwan, and additional design/technology centers in China, Korea and Ukraine.



**SILEGO**  
TECHNOLOGY

**Silego Technology Inc.**  
1515 Wyatt Drive  
Santa Clara, CA 95054

**Phone** : 408-327-8800  
**Fax** : 408-988-3800  
**Website** : [www.silego.com](http://www.silego.com)